

## KesäPitkä44




					Loon fuura   Don kussion
Oil Pattern Distance	44	Reverse Brush Drop	44	Oil Per Board	50 ul
Forward Oil Total	10.85 mL	Reverse Oil Total	10.25 mL	Volume Oil Total	21.1 mL
Tank Configuration	ALT	Tank A Conditioner	FIRE	Tank B Conditioner	FIRE

1 2L 2R 2 18 3 74 0.0 2.5 2.5 3700   2 9L 9R 2 18 3 46 2.5 7.6 5.1 2300   3 10L 10R 3 18 3 63 7.6 15.2 7.6 3150   4 12L 12R 2 18 3 34 15.2 20.3 5.1 1700   5 2L 2R 0 18 3 0 20.3 24.0 33.7 0   6 2L 2R 0 22 3 0 24.0 33.0 9.0 0   7 2L 2R 0 30 3 0 33.0 44.0 11.0 0	2 9L 9R 2 18 3 46 2.5 7.6 5.1 2300   3 10L 10R 3 18 3 63 7.6 15.2 7.6 3150   4 12L 12R 2 18 3 34 15.2 20.3 5.1 1700   5 2L 2R 0 18 3 0 20.3 24.0 3.7 0   6 2L 2R 0 22 3 0 24.0 33.0 9.0 0		START	STOP	LOADS	SPEED	BUFFER	CROSSED	START	END	FEET	T.OIL
3 10L 10R 3 18 3 63 7.6 15.2 7.6 3150   4 12L 12R 2 18 3 34 15.2 20.3 5.1 1700   5 2L 2R 0 18 3 0 20.3 24.0 3.7 0   6 2L 2R 0 22 3 0 24.0 33.0 9.0 0	3 10L 10R 3 18 3 63 7.6 15.2 7.6 3150   4 12L 12R 2 18 3 34 15.2 20.3 5.1 1700   5 2L 2R 0 18 3 0 20.3 24.0 3.7 0   6 2L 2R 0 22 3 0 24.0 33.0 9.0 0	1	2L	2R	2	18	3	74	0.0	2.5	2.5	3700
4 12L 12R 2 18 3 34 15.2 20.3 5.1 1700 5 2L 2R 0 18 3 0 20.3 24.0 3.7 0 6 2L 2R 0 22 3 0 24.0 33.0 9.0 0	4 12L 12R 2 18 3 34 15.2 20.3 5.1 1700 5 2L 2R 0 18 3 0 20.3 24.0 3.7 0 6 2L 2R 0 22 3 0 24.0 33.0 9.0 0	2	9L	9R	2	18	3	46	2.5	7.6	5.1	2300
5 2L 2R 0 18 3 0 20.3 24.0 3.7 0 6 2L 2R 0 22 3 0 24.0 33.0 9.0 0	5 2L 2R 0 18 3 0 20.3 24.0 3.7 0 6 2L 2R 0 22 3 0 24.0 33.0 9.0 0	3	10L	10R	3	18	3	63	7.6	15.2	7.6	3150
6 2L 2R 0 22 3 0 24.0 33.0 9.0 0	6 2L 2R 0 22 3 0 24.0 33.0 9.0 0	4	12L	12R	2	18	3	34	15.2	20.3	5.1	1700
		5	2L	2R	0	18	3	0	20.3	24.0	3.7	0
$ \  \   7\  \   2L  \   2R \qquad  \   0  \   30 \qquad  \   3 \qquad  \   0  33.0 \  \   44.0  11.0 \qquad  0 \\$	7 2L 2R 0 30 3 0 33.0 44.0 11.0 0	6	2L	2R	0	22	3	0	24.0	33.0	9.0	0
		7	2L	2R	0	30	3	0	33.0	44.0	11.0	0

	START	STOP	LOADS	SPEED	BUFFER	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	3	0	44.0	35.0	-9.0	0
2	14L	14R	3	18	3	39	35.0	27.4	-7.6	1950
3	13L	13R	4	18	3	60	27.4	17.2	-10.2	3000
4	12L	12R	4	14	3	68	17.2	9.3	-7.9	3400
5	11L	11R	2	10	3	38	9.3	6.5	-2.8	1900
6	2L	2R	0	10	3	0	6.5	0.0	-6.5	0

Cleaner Ratio Main Mix NA Cleaner Ratio Back End Mix NA Cleaner Ratio Back End Distance NA Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50

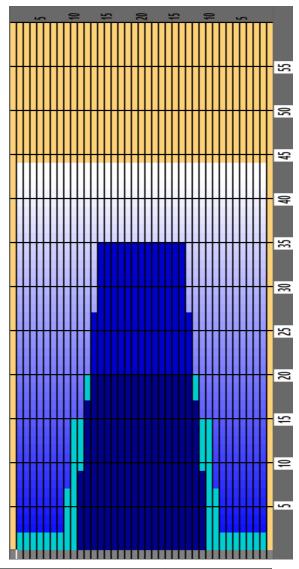

Item Description	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:ivilddie	Middle Track:Middle	inside frack;ivilddie	Mlddle: Inside Track	Middle:Middle Track	Middle:Outside Track
rack Zone Ratio	11	2.97	1.03	1.03	2.97	11
1500 1350 1200 1050 900 750 600 450 300 150						